


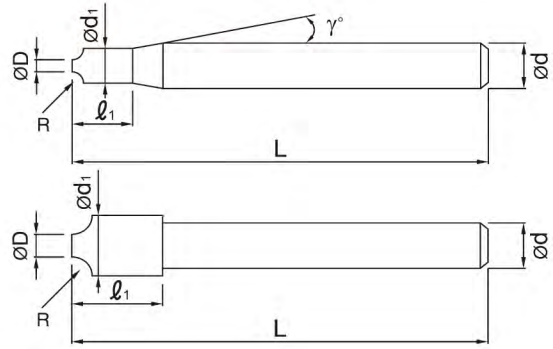


DIR 電極銅專用全鎢鋼外角R立銑刀

2-Flute Inner Radius Cutters for Copper Electrode · Aluminum & Plastic

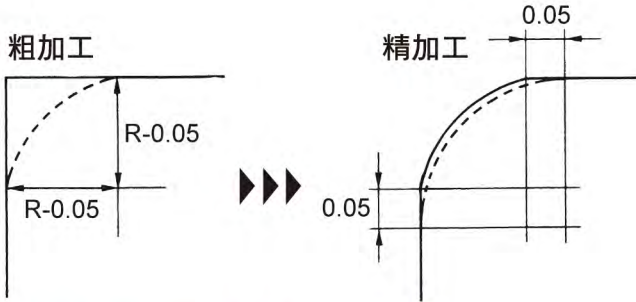

- * 實現世界上最小的外角R。
- * 最小先端徑從0.5mm開始。
- * 齊集豐富的外角R尺寸(0.1R~5R)。
- * 在NC上可設定外角R。

單位：mm

R角 (R)	先端徑 (D)	外徑長 (l ₁)	外徑 (d ₁)	首角 (γ)	形狀 Type	柄徑 (d)	全長 (L)	價(支)格
0.1	0.5	3	0.8	12°	A	4	45	7,100.00
0.15	0.5	3	0.9	12°	A	4	45	7,100.00
0.2	0.5	3	1	12°	A	4	45	7,100.00
0.25	0.5	3	1.1	12°	A	4	45	7,100.00
0.3	0.5	3	1.2	12°	A	4	45	5,810.00
0.35	0.5	3	1.3	12°	A	4	45	5,810.00
0.4	0.5	3	1.4	12°	A	4	45	5,810.00
0.45	0.5	3	1.5	12°	A	4	45	5,810.00
0.5	0.5	5	1.6	12°	A	4	45	5,810.00
0.55	0.5	5	1.7	12°	A	4	45	5,810.00
0.6	0.5	5	1.8	12°	A	4	45	4,330.00
0.65	0.5	5	1.9	12°	A	4	45	4,330.00
0.7	0.5	5	2	12°	A	4	45	4,330.00
0.75	0.5	5	2.1	12°	A	4	45	4,330.00
0.8	0.8	5	2.5	12°	A	4	45	4,330.00
0.85	0.8	5	2.6	12°	A	4	45	4,330.00
0.9	0.8	5	2.7	12°	A	4	45	4,330.00
0.95	0.8	5	2.8	12°	A	4	45	4,330.00
1	0.8	8	2.9	12°	A	4	45	4,970.00
1.25	0.8	8	3.4	12°	A	4	45	4,970.00
1.5	1.5	8	4.6	-	B	4	45	4,970.00
1.75	1.5	8	5.1	-	B	4	45	4,970.00
2	1.5	10	5.6	-	B	4	45	4,970.00
2.5	1.5	10	6.6	-	B	6	45	5,750.00
3	1.5	12	7.6	45°	A	8	55	5,870.00
3.5	2	12	9.1	45°	A	10	55	7,360.00
4	2	12	10.1	-	B	10	55	6,390.00
4.5	2	15	11.1	45°	A	12	65	7,870.00
5	2	15	12.1	-	B	12	65	7,230.00

電極銅加工用 for Copper Electrode