



DTEL 電極銅專用全鎢鋼長刃斜刃立銑刀

2-Flute Long Taper End Mills for Copper Electrode · Aluminum & Plastic

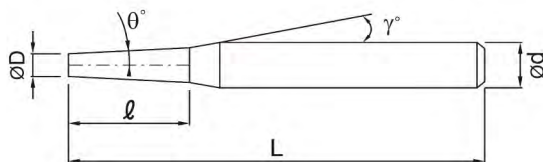

- * 刀長是先端徑的8倍。
- * 適合於銅加工專用的傾斜角，單角規格從30'~5°。
- * 精加工時，側面面粗度達到0.2μm。



D=先端徑
θ°=單角



單位：mm

先端徑 (D)	單角 (θ)	刃長 (l)	粗端徑 (d ₁)	首角 (γ)	柄徑 (d)	全長 (L)	價(支)格
1	30'	8	1.14	9°	4	50	8,650.00
1	1°	8	1.28	9°	4	50	8,650.00
1	1°30'	8	1.42	9°	4	50	8,650.00
1	2°	8	1.56	9°	4	50	8,650.00
1	3°	8	1.84	9°	4	50	8,650.00
1	4°	8	2.12	-	4	50	9,290.00
1	5°	8	2.4	-	4	50	9,290.00
1.5	30'	12	1.71	9°	4	50	10,000.00
1.5	1°	12	1.92	9°	4	50	10,000.00
1.5	1°30'	12	2.13	9°	4	50	10,000.00
1.5	2°	12	2.34	9°	4	50	10,000.00
1.5	3°	12	2.76	9°	4	50	10,000.00
1.5	4°	12	3.18	-	4	50	10,780.00
1.5	5°	12	3.6	-	4	50	10,780.00
2	30'	16	2.28	9°	4	50	10,780.00
2	1°	16	2.56	9°	4	50	10,780.00
2	1°30'	16	2.84	9°	4	50	10,780.00
2	2°	16	3.12	9°	4	50	10,780.00
2	3°	16	3.68	-	4	50	10,780.00
2	4°	16	4.24	-	4	60	15,480.00
2	5°	16	4.8	-	4	60	15,480.00
2.5	30'	20	2.85	9°	4	60	12,390.00
2.5	1°	20	3.2	9°	4	60	12,390.00
2.5	1°30'	20	3.55	9°	4	60	12,390.00
2.5	2°	20	3.9	-	4	60	12,390.00
2.5	3°	20	4.6	-	4	60	12,390.00
2.5	4°	20	5.3	-	4	60	17,030.00
2.5	5°	20	6	-	6	60	17,030.00

電極銅加工用
for Copper Electrode

DTEL 電極銅專用全鎢鋼長刃斜刃立銑刀

2-Flute Long Taper End Mills for Copper Electrode · Aluminum & Plastic

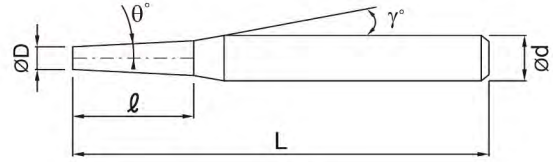

D=先端徑
 θ° =單角

單位：mm



- * 刀長是先端徑的8倍。
- * 適合於銅加工專用的傾斜角，單角規格從30'~5°。
- * 精加工時，側面面粗度達到0.2 μ m。

先端徑 (D)	單角 (θ)	刃長 (ℓ)	粗端徑 (d_1)	首角 (γ)	柄徑 (d)	全長 (L)	價(支)格
3	30'	24	3.42	9°	4	60	15,480.00
3	1°	24	3.84	—	4	60	15,480.00
3	1°30'	24	4.26	—	4	60	15,480.00
3	2°	24	4.68	—	4	60	15,480.00
3	3°	24	5.52	—	4	60	15,480.00
3	4°	24	6.36	—	6	60	19,350.00
3	5°	24	7.2	—	6	60	19,350.00
4	30'	32	4.56	—	4	80	19,350.00
4	1°	32	5.12	—	4	80	19,350.00
4	1°30'	32	5.68	—	4	80	19,350.00
4	2°	32	6.23	—	6	80	19,350.00
4	3°	32	7.35	—	6	80	20,000.00
4	4°	32	8.48	—	8	80	23,030.00
4	5°	32	9.6	—	10	90	24,770.00
5	30'	40	5.7	—	4	80	21,290.00
5	1°	40	6.4	—	6	80	21,290.00
5	1°30'	40	7.09	—	6	80	21,290.00
5	2°	40	7.79	—	6	80	21,290.00
5	3°	40	9.19	—	8	90	24,770.00
5	4°	40	10.59	—	10	90	26,390.00
5	5°	40	12	—	12	90	27,420.00
6	30'	48	6.84	—	6	100	23,220.00
6	1°	48	7.68	—	6	100	23,220.00
6	1°30'	48	8.51	—	8	100	23,220.00
6	2°	48	9.35	—	8	100	23,220.00
6	3°	48	11.03	—	10	100	26,390.00
6	4°	48	12.71	—	12	100	27,420.00
6	5°	48	14.4	—	12	100	30,960.00
8	30'	64	9.12	—	8	120	24,770.00
8	1°	64	10.23	—	10	120	24,770.00
8	1°30'	64	11.35	—	10	120	24,770.00
8	2°	64	12.47	—	12	120	24,770.00
8	3°	64	14.71	—	12	120	28,000.00
8	4°	64	16.95	—	16	125	30,960.00
8	5°	64	19.2	—	20	130	38,700.00

電極銅加工用 for Copper Electrode

FCT 匯聚貿易 / 匯穎國際